



## Royde & Tucker H102-300 HI-LOAD Anti-ligature butt hinge

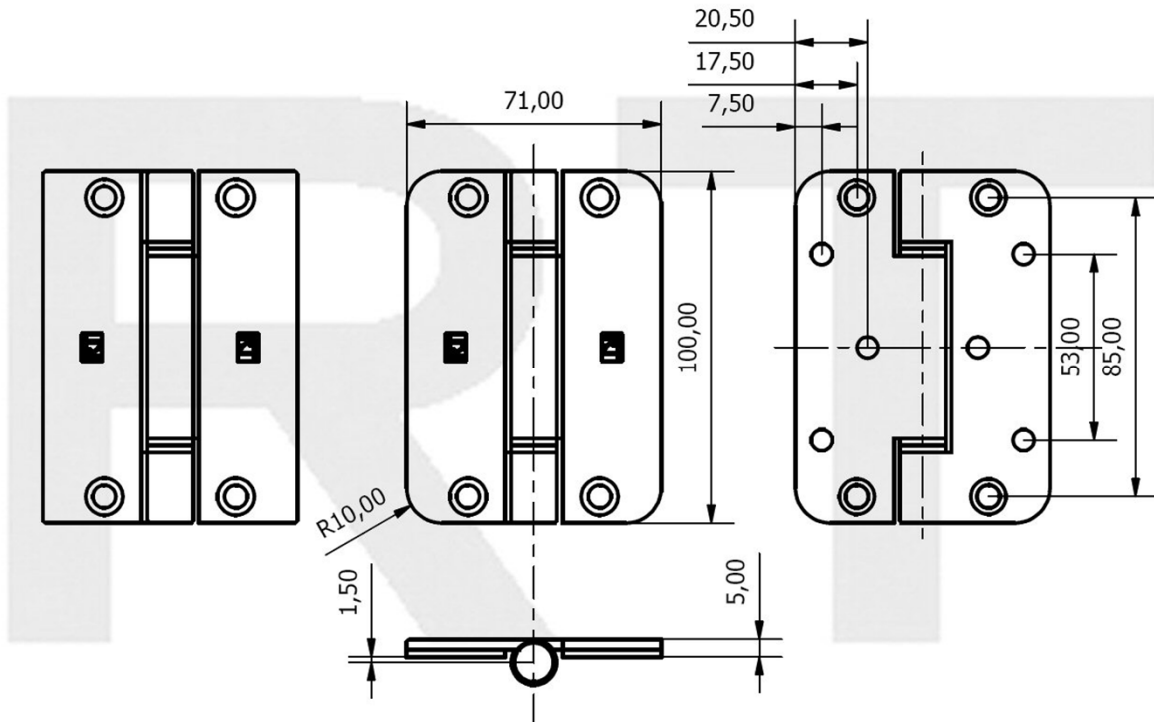

- 100x71x5mm Three knuckle butt hinge
- Tested to & passed the DHF TS 001: Door mounted anti-ligature devices. Certificate TC/07/09/01/C1 Grade 4
- Maximum adjusted door weight 120kg
- To BS EN 1935 Grade 13
- Minimum door thickness 44mm
- Maintenance free, guaranteed for 25 years
- CE Certificate No. 1121-CPR-AC0063
- Suitable for use on fire doors: Certifire approved – CF209
- To be fitted with HP102-300 intumescent hinge pads, if being installed on fire doors
- 4 x Security Resistorx screws to security faceplates
- 6 x metric 5 x 32mm wood screws
- Unless otherwise stated stainless steel substrate, Grade 316 stainless steel available

Note:

- Mortice detail "A" for installation



**Royde & Tucker Ltd**  
 Bilton Road  
 Cadwell lane  
 Hitchin  
 SG4 0SB  
 Tel:01462 444444  
 Fax:01462 444433  
 www.ratman.co.uk  
 e-mail: sales@ratman.co.uk