


Royde & Tucker H102-C HI-LOAD swing clear butt hinge

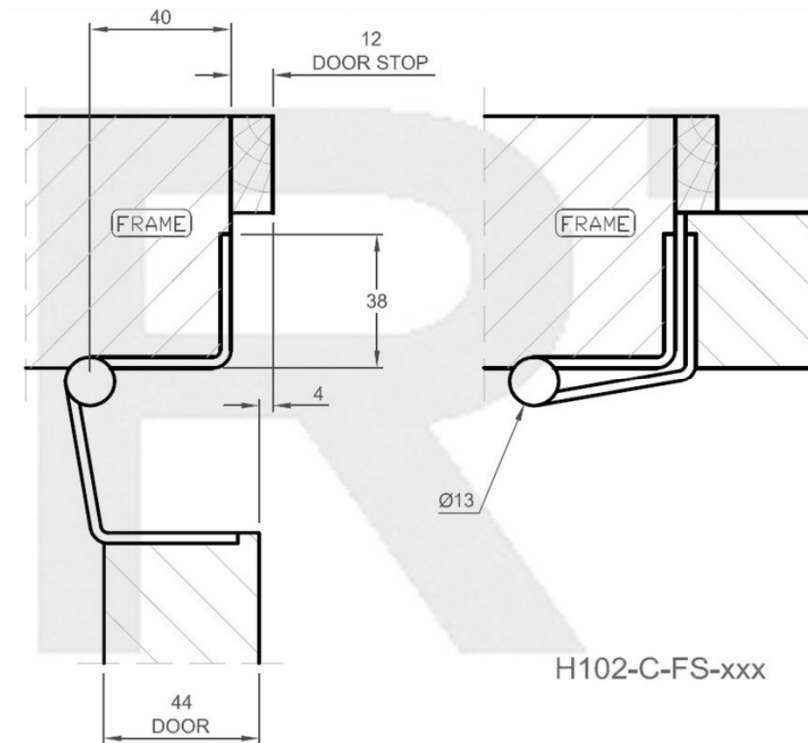

Purpose

To improve access through door openings by swinging clear, permitting wide objects such as hospital beds or wheelchairs to pass freely, preventing damage to door and/or equipment.

Operation

The swing clear hinge, when opened by only 90°, will position the door outside the line of the door stop. It is suitable for use on 35mm or 45mm thick doors and a maximum adjusted door weight of 80kg.

- 100x124x3mm Three knuckle swing clear butt hinge
- Maximum adjusted door weight 80kg
- Minimum door thickness 44mm
- Maintenance free, guaranteed for 25 years
- FD30 Fire Rated. WFRC No. 138907 Issue 8
- To be fitted with 3no HP102 intumescent hinge pads, if being installed on fire doors
- CE marking of this hinge is not required under CPD as it falls outside the scope of EN1935
- c/w metric 5 x 32mm wood screws
- Unless stated manufactured in Grade 304 stainless steel

Royde & Tucker Ltd
Bilton Road
Cadwell lane
Hitchin
SG4 0SB

Tel: 01462 444444

Fax: 01462 444433

www.ratman.co.uk

e-mail: sales@ratman.co.uk