


Royde & Tucker H1254-2&3 HI-LOAD conductor hinge

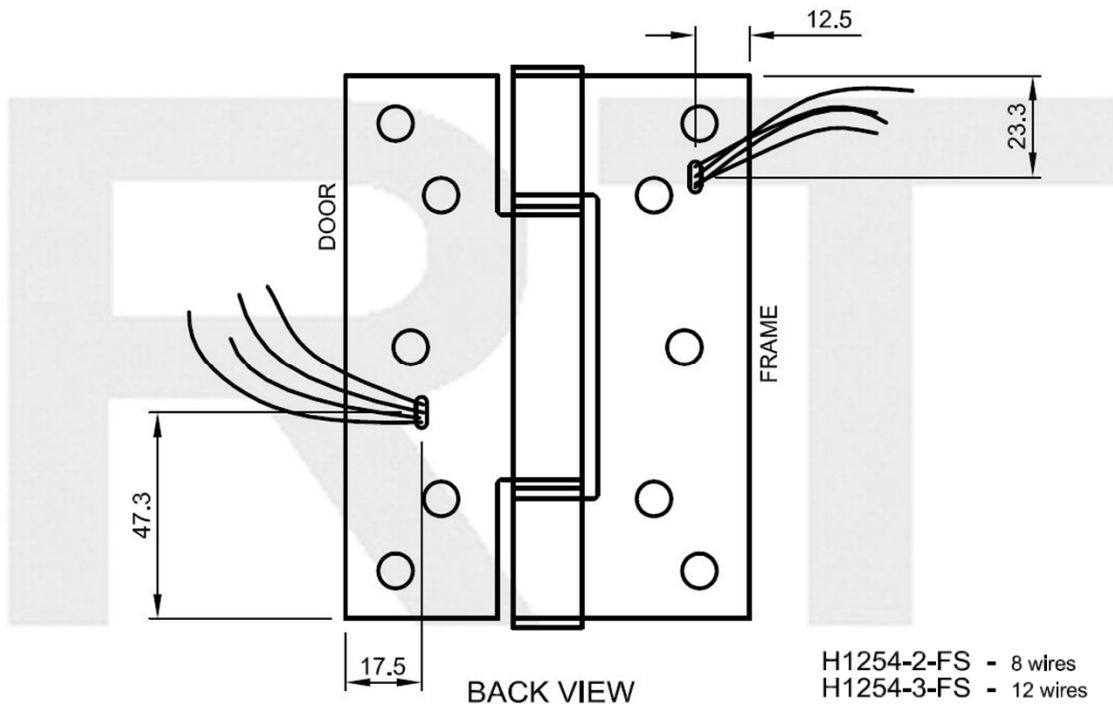

- Conductor hinge. Allow the concealed transfer of power from the door frame into the door leaf. Non load-bearing, use as 3rd hinge.
- 125x93x3.25mm Three knuckle butt hinge
- Maintenance free, guaranteed for 25 years
- Appropriate for use with backcheck door closers
- Minimum door thickness 44mm
- Maximum voltage 24v. Maximum current: 2.0 amp per conductor
- Number of conductors 8 or 12
- High temperature wire: Silver plated copper wire with PTFE insulation to BS 2G 210
- High chemical and thermal stability
- Wire length: 250mm frame leaf, 1000mm door leaf
- c/w metric 6 x 32mm wood screws
- Unless stated Mild steel substrate, Grade 304 or 316 stainless steel available

Royde & Tucker Ltd
Bilton Road
Cadwell lane
Hitchin
SG4 0SB

Tel: 01462 444444

Fax: 01462 444433

www.ratman.co.uk

e-mail: sales@ratman.co.uk