


Royde & Tucker H1254-B HI-LOAD projection butt hinge



BS EN 1935

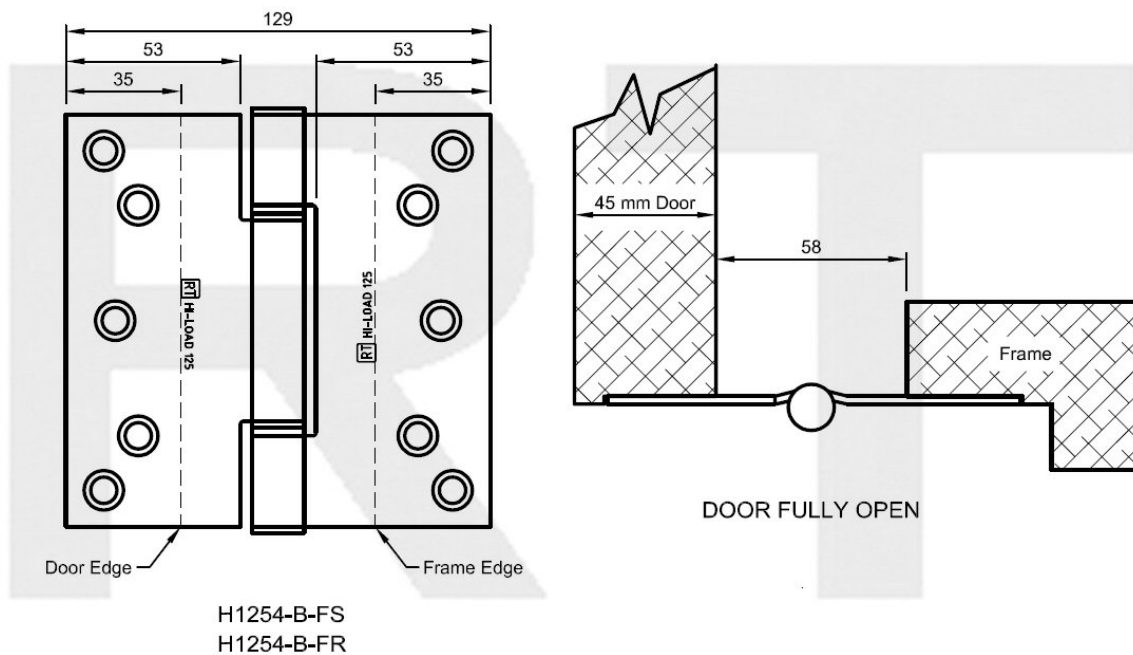

- Allows the door leaf to pivot around obstructions such as architrave. 29mm projection (129mm overall width).
- 125x129x3.25mm Three knuckle projection butt hinge
- Maximum adjusted door weight 100kg
- To BS EN 1935 Grade 13
- Minimum door thickness 44mm
- Maintenance free, guaranteed for 25 years
- CE Certificate No. 2812-CPR-AC0064
- Suitable for use on fire doors: Certifire approved – CF209
- To be fitted with HP1254 intumescent hinge pads, if being installed on fire doors
- c/w metric 6 x 32mm wood screws
- Unless stated Mild steel substrate, Grade 304 or 316 stainless steel available

Royde & Tucker Ltd
Bilton Road
Cadwell lane
Hitchin
SG4 0SB

Tel: 01462 444444

Fax: 01462 444433

www.ratman.co.uk

e-mail: sales@ratman.co.uk