


Royde & Tucker H207-0,1&2 HI-LOAD conductor hinges

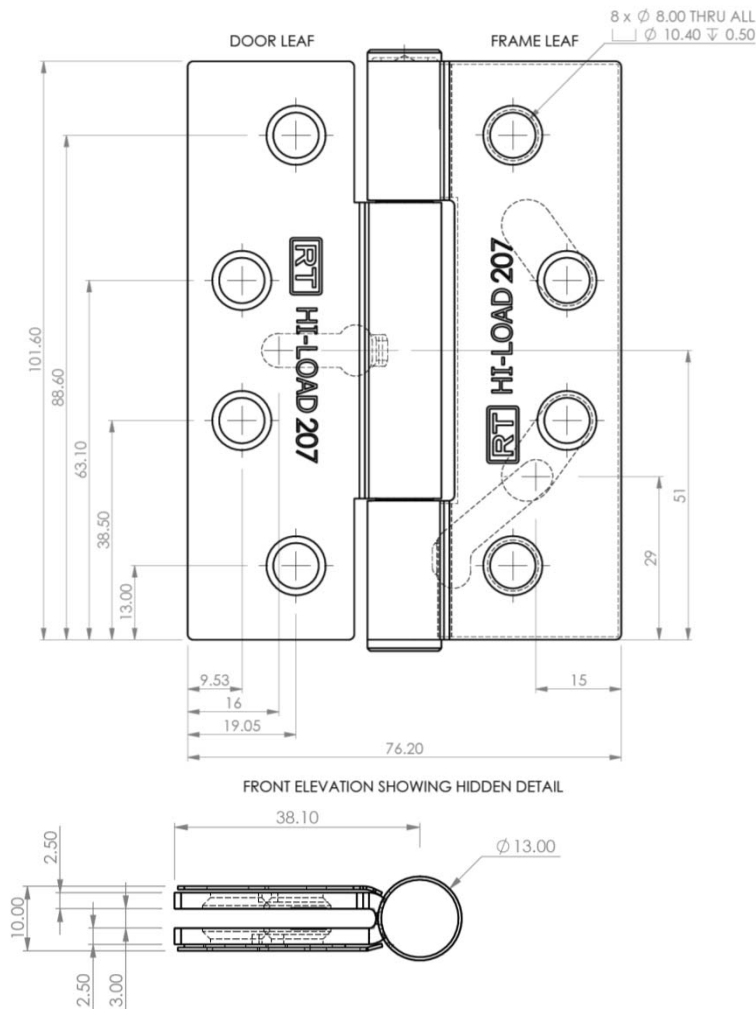

- Concealed bearing conductor hinge. Allow the concealed transfer of power from the door frame into the door leaf.
- 101.6x76.2x3mm Three knuckle butt hinge
- Minimum door thickness 44mm
- Maintenance free
- Maximum voltage 24v. Maximum current: 2.0 amp per conductor
- Number of conductors 2 or 4 or 8
- High temperature, chemical and thermal stability wire: Silver plated copper with PTFE insulation to BS 2G 210
- Wire length: 250mm frameleaf, 1000mm doorleaf
- To be fitted with HP207 intumescent hinge pads, if being installed on fire doors
- c/w metric 5 x 32mm wood screws
- Unless stated stainless steel substrate, 316 stainless steel available

Royde & Tucker Ltd
Bilton Road
Cadwell lane
Hitchin
SG4 0SB
Tel: 01462 444444
Fax: 01462 444433
www.ratman.co.uk
e-mail: sales@ratman.co.uk