


Royde & Tucker G4540 (G4540-5, with dogbolt) HI-LOAD concealed bearing butt hinge



BS EN 1935

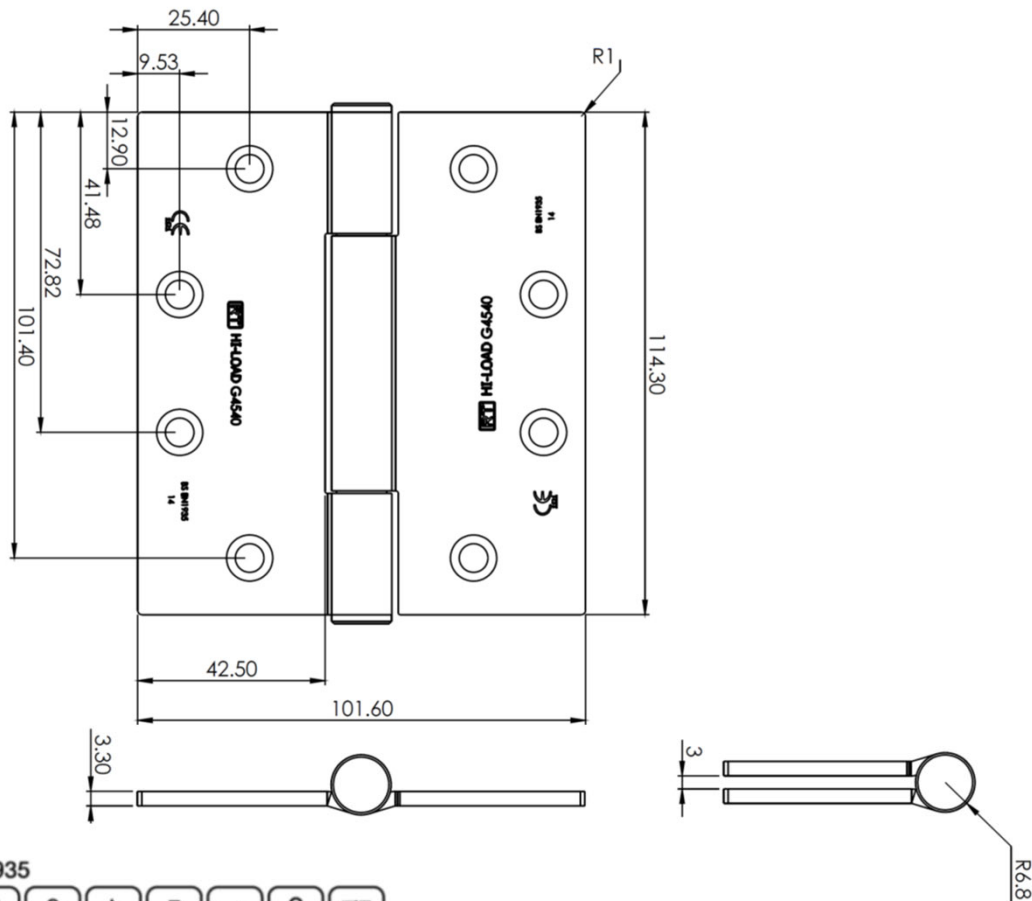

- 114.3x101.6x3.25mm Three knuckle butt hinge
- Radius corner version, R10mm
- Maximum adjusted door weight 160kg
- To BS EN 1935 Grade 14
- Minimum door thickness 44mm
- Maintenance free, guaranteed for 25 years
- CE Certificate No. 2812-CPR-AC5108
- CE Certificate No. 2812-CPR-AC5128 (Dog Bolt version)
- Suitable for use on fire doors: Certifire approved – CF215
- To be fitted with HP4540 intumescent hinge pads, if being installed on fire doors
- c/w metric 5 x 32mm wood screws
- Unless otherwise stated stainless steel substrate, Grade 316 stainless steel available

Royde & Tucker Ltd
 Bilton Road
 Cadwell lane
 Hitchin
 SG4 0SB

Tel: 01462 444444

Fax: 01462 444433

www.ratman.co.uk

e-mail: sales@ratman.co.uk