


## Royde & Tucker G4545 (G4545-5, with dogbolt) HI-LOAD concealed bearing butt hinge



BS EN 1935

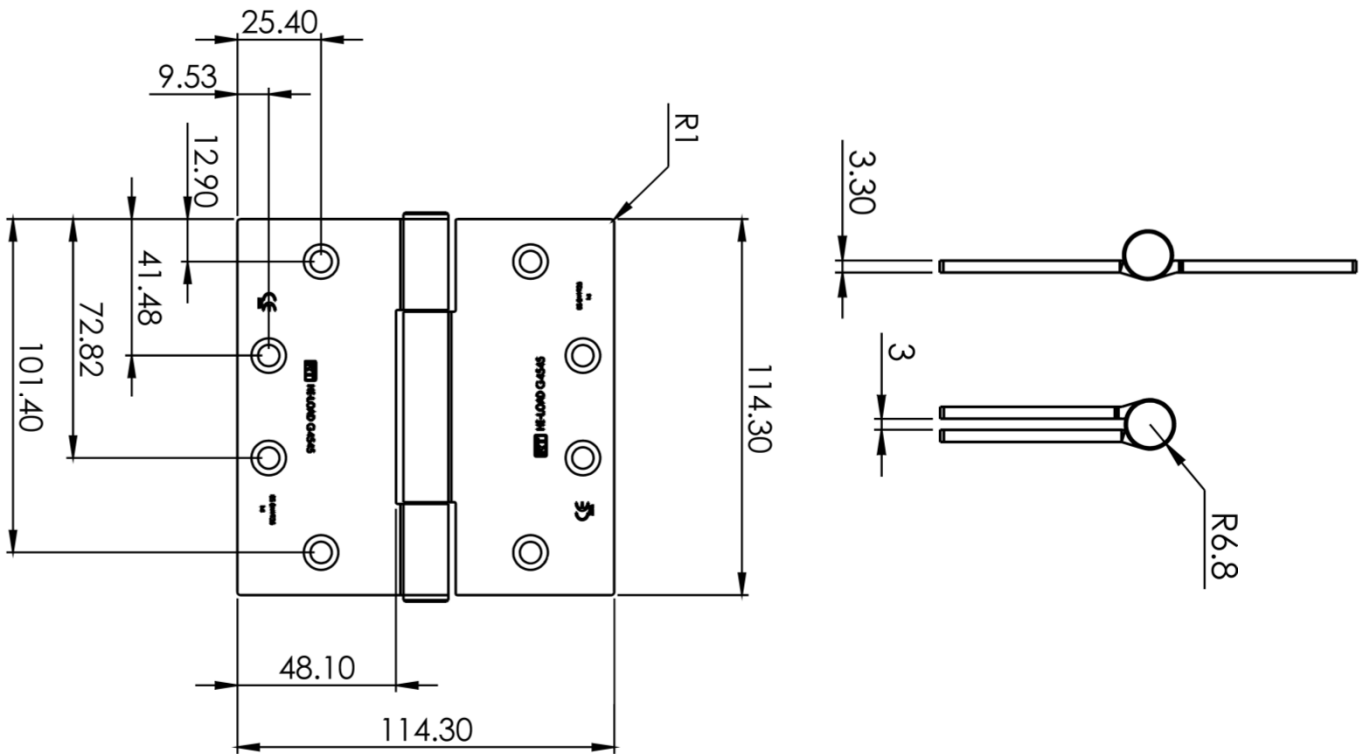

- 114.3x114.2x3.25mm Three knuckle butt hinge
- Radius corner version, R10mm
- Maximum adjusted door weight 160kg
- To BS EN 1935 Grade 14
- Minimum door thickness 54mm
- Maintenance free, guaranteed for 25 years
- CE Certificate No. 2812-CPR-AC5108
- CE Certificate No. 2812-CPR-AC5128 (Dog Bolt version)
- Suitable for use on fire doors: Certifire approved – CF215
- To be fitted with HP4545 (2mm total thickness) intumescent hinge pads, if being installed on fire doors
- c/w metric 5 x 32mm wood screws
- Unless otherwise stated stainless steel substrate, Grade 316 stainless steel available

**Royde & Tucker Ltd**  
Bilton Road  
Cadwell lane  
Hitchin  
SG4 0SB

Tel: 01462 444444  
Fax: 01462 444433  
www.ratman.co.uk

e-mail: sales@ratman.co.uk