



Royde & Tucker H202 HI-LOAD concealed bearing hinge, (lift-off H208)

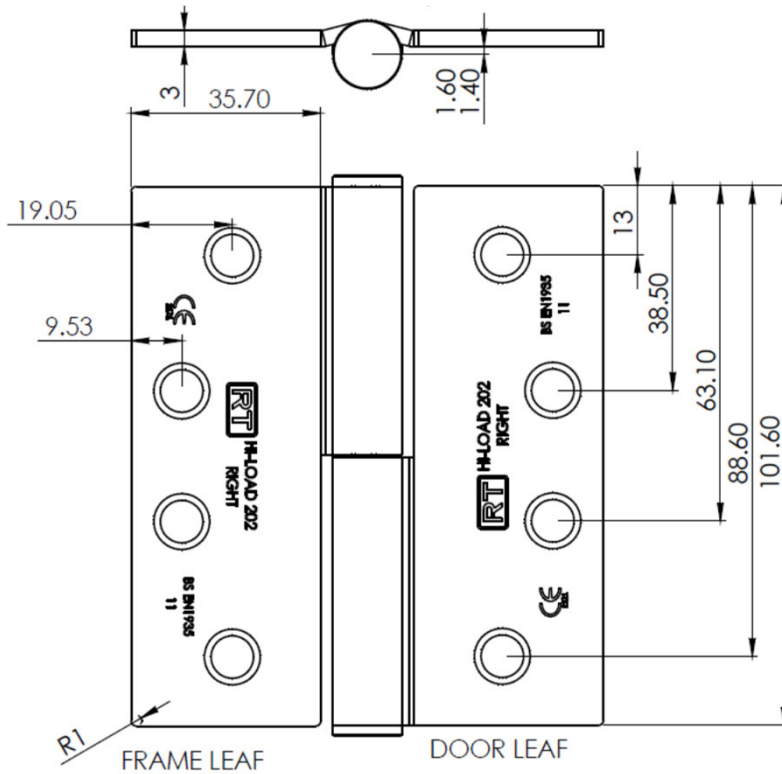

RH shown

BS EN 1935



- Concealed bearing lift off version of H208
- Radius corners version, R10
- 101.6x88.9x3.25mm Lift-off hinge
- Maximum adjusted door weight 120kg
- To BS EN 1935 Grade 13
- Minimum door thickness 44mm
- Maintenance free, guaranteed for 25 years
- CE Certificate No. 2812-CPR-AC0010 (SS)
- Suitable for use on fire doors: Certifire approved – CF215
- To be fitted with HP208 intumescent hinge pads, if being installed on fire doors
- c/w metric 5 x 32mm wood screws
- Unless otherwise stated stainless steel substrate, Grade 316 stainless steel available

**Royde & Tucker Ltd**  
Bilton Road  
Cadwell lane  
Hitchin  
SG4 0SB  
Tel: 01462 444444  
Fax: 01462 444433  
www.ratman.co.uk  
e-mail: sales@ratman.co.uk